



CA-J/K 型
CB-J/K 型

中荷重用プレス製キャスト 鋳鉄車輪付

中荷重用鋳鉄車輪付自在車

(CA-J型)


(CB-J型)



CA-J150



CB-J150

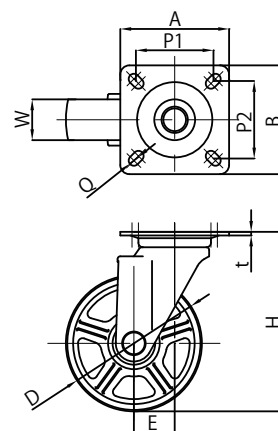

(単位:mm)

| 品名 | 車輪外径 D | 許容荷重 (kg) | 取付高 H | 取付座 AxB | 取付寸法 P1xP2 | 取付穴 Q | ベース厚 t | 偏芯 E | 製品重量 | |
|-----------------|-----------|--------------|----------|------------|---------------|----------|-----------|---------|--------|--------|
| | | | | | | | | | CA(kg) | CB(kg) |
| CA-J75/CB-J75 | 75 | 120 | 101 | 82x82 | 63x63 | 9.5 | 2.3 | 29 | 0.9 | 1.1 |
| CA-J100/CB-J100 | 100 | 180 | 144 | 95x95 | 71x71 | 11.0 | 3.2 | 35 | 1.6 | 1.7 |
| CA-J130/CB-J130 | 130 | 250 | 177 | 108x108 | 80x80 | 11.0 | 4 | 40 | 2.8 | 3.2 |
| CA-J150/CB-J150 | 150 | 300 | 198 | 120x120 | 90x90 | 11.0 | 4 | 45 | 3.6 | 3.9 |
| CA-J180/CB-J180 | 180 | 420 | 240 | 140x140 | 112x112 | 11.5 | 4 | 58 | 4.7 | 4.3 |
| CA-J200/CB-J200 | 200 | 420 | 250 | 140x140 | 112x112 | 11.5 | 4 | 58 | 5.2 | 5.5 |
| CA-J250/CB-J250 | 250 | 550 | 305 | 160x160 | 125x125 | 14.0 | 4 | 71 | 8.8 | 9.7 |
| CB-J300 | 300 | 600 | 374 | 175x175 | 140x140 | 14.0 | 4.5 | 71 | | 12.4 |

中荷重用鋳鉄車輪付固定車

(CA-K型)


(CB-K型)



CA-K150



CB-K150

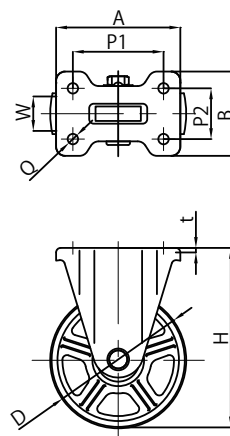

(単位:mm)

| 品名 | 車輪外径 D | 許容荷重 (kg) | 取付高 H | 取付座 AxB | 取付寸法 P1xP2 | 取付穴 Q | ベース厚 t | 製品重量 | |
|-----------------|-----------|--------------|----------|------------|---------------|----------|-----------|--------|--------|
| | | | | | | | | CA(kg) | CB(kg) |
| CA-K75/CB-K75 | 75 | 120 | 101 | 95x72 | 63x40 | 9.5 | 2.3 | 0.7 | 0.9 |
| CA-K100/CB-K100 | 100 | 180 | 144 | 115x80 | 80x45 | 10.5 | 2.6 | 1.3 | 1.4 |
| CA-K130/CB-K130 | 130 | 250 | 177 | 137x93 | 100x56 | 11.0 | 2.6 | 2.5 | 2.8 |
| CA-K150/CB-K150 | 150 | 300 | 198 | 137x93 | 100x56 | 11.0 | 3.2 | 3.2 | 3.5 |
| CA-K180/CB-K180 | 180 | 420 | 240 | 151x102 | 112x63 | 11.5 | 4.5 | 3.8 | 4.5 |
| CA-K200/CB-K200 | 200 | 420 | 250 | 151x102 | 112x63 | 11.5 | 4.5 | 4.4 | 4.6 |
| CA-K250/CB-K250 | 250 | 550 | 305 | 200x140 | 140x80 | 14.0 | 4.5 | 7.9 | 8.8 |
| CB-K300 | 300 | 600 | 374 | 220x150 | 160x90 | 14.0 | 4.5 | | 12.0 |



CA-JB/KB 型
CB-JB/KB 型

中荷重用プレス製キャスター 鋳鉄車輪付

中荷重用鋳鉄車輪付自在車ストッパー付

(CA-JB型)


(CB-JB型)



CA-JB150



CB-JB150

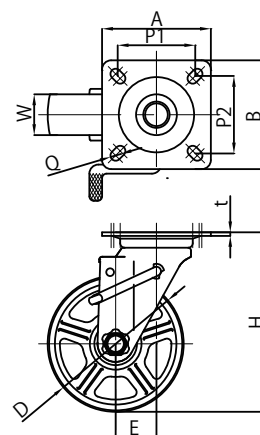

(単位:mm)

| 品名 | 車輪外径 | 許容荷重 (kg) | 取付高 H | 取付座 AxB | 取付寸法 P1xP2 | 取付穴 Q | ベース厚 t | 偏芯 E | 製品重量 | |
|-------------------|------|--------------|----------|------------|---------------|----------|-----------|---------|--------|--------|
| | D | | | | | | | | CA(kg) | CB(kg) |
| CA-JB75/CB-JB75 | 75 | 120 | 101 | 82x82 | 63x63 | 9.5 | 2.3 | 29 | 1.0 | 1.2 |
| CA-JB100/CB-JB100 | 100 | 180 | 144 | 95x95 | 71x71 | 11.0 | 3.2 | 35 | 1.7 | 1.8 |
| CA-JB130/CB-JB130 | 130 | 250 | 177 | 108x108 | 80x80 | 11.0 | 4 | 40 | 3.1 | 3.4 |
| CA-JB150/CB-JB150 | 150 | 300 | 198 | 120x120 | 90x90 | 11.0 | 4 | 45 | 3.8 | 4.1 |
| CA-JB200/CB-JB200 | 200 | 420 | 250 | 140x140 | 112x112 | 11.5 | 4 | 58 | 5.6 | 5.8 |
| CA-JB250/CB-JB250 | 250 | 550 | 305 | 160x160 | 125x125 | 14.0 | 4 | 71 | 9.2 | 10.1 |

中荷重用鋳鉄車輪付固定車ストッパー付

(CA-KB型)


(CB-KB型)



CA-KB150




CB-KB150

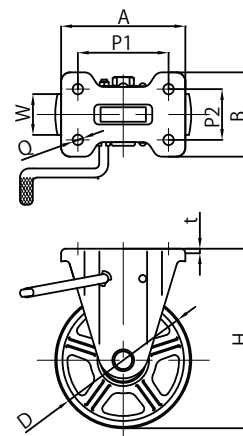


(単位:mm)

| 品名 | 車輪外径 | 許容荷重 (kg) | 取付高 H | 取付座 AxB | 取付寸法 P1xP2 | 取付穴 Q | ベース厚 t | 製品重量 | |
|-------------------|------|--------------|----------|------------|---------------|----------|-----------|--------|--------|
| | D | | | | | | | CA(kg) | CB(kg) |
| CA-KB75/CB-KB75 | 75 | 120 | 101 | 95x72 | 63x40 | 9.5 | 2.3 | 0.8 | 1.0 |
| CA-KB100/CB-KB100 | 100 | 180 | 144 | 115x80 | 80x45 | 10.5 | 2.6 | 1.5 | 1.6 |
| CA-KB130/CB-KB130 | 130 | 250 | 177 | 137x93 | 100x56 | 11.0 | 2.6 | 2.7 | 3.0 |
| CA-KB150/CB-KB150 | 150 | 300 | 198 | 137x93 | 100x56 | 11.0 | 3.2 | 3.4 | 3.7 |
| CA-KB200/CB-KB200 | 200 | 420 | 250 | 151x102 | 112x63 | 11.5 | 4.5 | 4.6 | 4.8 |



CA 型



CB 型

CA 型はベアリングなし、
CB 型はベアリング入仕様です。